

## DGT4

### DGT4 - 4-CHANNEL WEIGHT TRANSMITTER



4-channel weight transmitter for weight transfer to PLC via fieldbus, analog output or RS485. It allows the reading and diagnostics of each load cell or each connected scale (up to 4).

---

**Available versions:**

**PROFINET I/O | ETHERNET IP | ETHERCAT |  
MODBUS TCP | CANOPEN | DEVICENET |  
PROFIBUS | ANALOG OUTPUT | RS485**

---

**Integrated WebServer as standard**

---

Working in cooperation with:

**CBH VAEGTE APS**

VONSILDVEJ 207 - 6000 - KOLDING - DENMARK  
Tel. 004575567310 Fax. 004575567320  
info@cbh-vaegte.dk

**The best solution  
for advanced industrial  
applications**

## MAIN FEATURES

- Power supply: 12-24Vdc
- Converter: A/D 24 bit with 4 channel
- Max scale number: 4
- Load cells connection: 4 or 6 wires (with sense)
- Operating modes:
  - Digital junction box
  - Multi-scale transmitter
- Speed: up to 3200 conv./sec
- Displaying: up to 1.000.000d
- Signal sensitivity: 0,03  $\mu\text{V/d}$  (0,03  $\mu\text{V/e}$ )
- Resolution: 3.000.000 points
- Linearization: up to 8 points
- Connectable load cells: up to 8 350  $\Omega$  cells
- BUS: depending on the model (See version chart)
- Serial ports:
  - 1 RS232 for configuration from PC with "Dinitools®"
  - 1 RS485 Port (Mod. DGT4 / DGT4 AN)
- Analog output: 16 bit (DGT4AN Model) choosing between 4-20mA, 0-5Vdc or 0-10Vdc.
- Digital outputs: n. 2 configurable OUTPUTS
- Digital inputs: n. 2 configurable INPUTS
- Certifications:
  - OIML R76 (10000e o 3000 + 3000e) / R51 / R61 MID
  - UL Listed (upon request)
  - EU Type Examination Certificate (45501:2015)
- Case: ABS, for Din bar (106 x 90 x 58 mm)
- Calibration:
  - Theoretical (mV\V)
  - With sample weights
  - Remotely by WEB SERVER
  - From the keyboard
  - From PC with "Dinitools"
- Keyboard functions:
  - Zeroing
  - Tare
  - Function mode
  - Manual data printing/sending
  - On/Stand-by
- Program functions:
  - Setpoint
  - High resolution
  - Peak
  - Alibi Memory
  - Unit of measure conversion
- Keyboard: mechanical with 5 digits
- Display: 13mm red LED

## FUNCTIONS AND DATA AVAILABLE VIA FIELDBUS

- NET, GROSS and TARE weight
- DIGITAL INPUTS status
- RELAY OUTPUTS status
- SETPOINT setting
- Alibi memory writing and reading (optional)
- Weight status (eg positive, negative, stable, unstable)
  - Error conditions (eg overload, underload)
  - Calibration
- SETUP configuration
- Diagnostics of each converter channel

## INTEGRATED WEB SERVER

The integrated WEB SERVER allows complete diagnostics, calibration and remote configuration of the weight transmitter from ethernet network.


## UPON REQUEST

- Special programs according to customer specifications
- Kit for legal for trade approval

### DETAIL 1




#### DIGITAL EQUALISATION BOX MODE

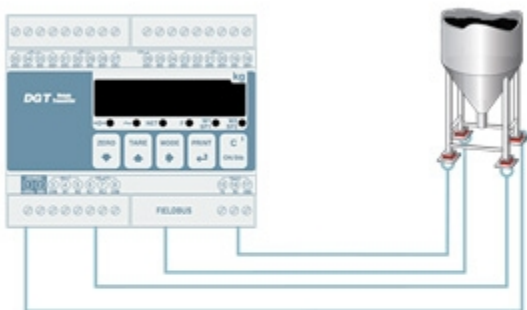

### DETAIL 2



#### 4 SCALES MODE

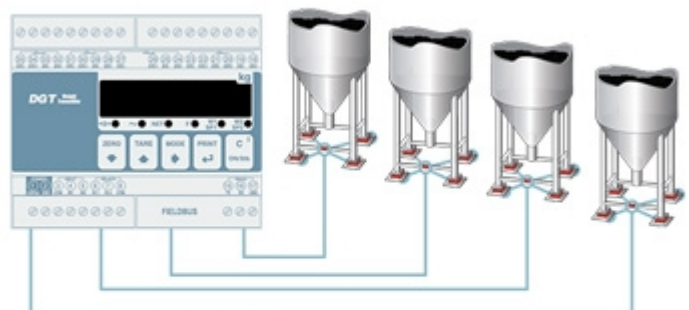

# DETAIL 3

Home Sign out Change password Release 1.0

System Printer On On Off Network T/P

ID	GROSS	NET	TARE	UNIT	STATUS	ZERO
1	508	508	0	kg	OK NET ING OUT1 OK/F2	SAVE

ACC: none

**FRAME TESTS**

Unit: kg  
Decimals: 0  
Capacity 1: 10000  
Capacity 2: 0  
Division 1: 1  
Division 2: \*

**CALIBRATION**

Cal points: 1  
Weight: ADC

Point	Weight	ADC
Point 1	10000	2147484
Point 2	0	0
Point 3	0	0

**COMMANDS**

KEYBOARD LOCK  
KEYBOARD UNLOCK  
SCALE REBOOT  
WRITE PARAMETERS  
WRITE SETPOINTS

**SETPOINTS**

Setpoint 1 on  
Setpoint 1 off  
Setpoint 2 on  
Setpoint 2 off



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO  
FRANCE sarl  
Nogent-sur-Marne

DINI ARGEO  
GMBH  
Sinsheim - Germany

DINI ARGEO  
UK Ltd  
Taunton - United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
Shanghai - China

DINI ARGEO  
WEIGHBRIDGES  
Calto (RO) – Italy



HEAD OFFICE  
Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena - Italy



**CBH VAEGTE APS**

VONSILDVEJ 207 - 6000 - KOLDING - DENMARK

Tel. 004575567310 Fax. 004575567320

info@cbh-vaegte.dk

SALES AND TECHNICAL ASSISTANCE SERVICE