

EPWL

EPWL "LOGISTIC" PALLET-WEIGHING FLOOR SCALES SERIES



Quick and accurate pallet weighing scales, easy to use and transport. Integrated extractable weight indicator complete of stretchable connection cable which may be easily positioned according to one's weighing requirements. Functions with a built-in battery with extractable drawer for easy substitution. The automatic multirange capacity allows the maximum accuracy on the lower weight values, maintaining the same load capacity. Available also in dual range APPROVED version, for legal for trade use.

The best solution
for advanced industrial
applications

MAIN FEATURES

- Weight indicator with support bracket having an adjustable inclination, for use on the table, column, or wall.
- LCD 25mm backlit display with 6 high contrast digits and icons for indication of active functions.
- ABS IP54 case, easy to clean and resistant in harsh and corrosive environments.
- Waterproof 5-key functional keypad.
- Functions with 4 shear beam 1000 Ohm aluminium load cells approved according to OIML R60 C3 standards (3000+3000 divisions), IP67 protection degree, able to handle double the nominal load.
- Carbon steel oven-fire painted bearing structure, complete of adjustable feet.
- Level, wheels, and transport handle.
- Connection cable to the indicator, 3 m long.
- Accuracy: +/-0,05% of the capacity.
- Programmable automatic switch-off.
- Digital calibration and Set-Up from keypad or from PC through DINITOOLS.
- Power supply from 5 to 12 Vdc
- Standard fitted with extractable drawer for housing 4 AA batteries (not included), which may be rechargeable, and standard connector for connection to external power adapter (if connected, it excludes the battery power).

SELECTABLE AND KEYPAD FUNCTIONS


- Clearing; automatic and manual tare, print.
- X 10 High resolution visualisation.
- Net/Gross or lb/kg conversion.
- Accumulation.
- Formula weighing.
- +/- Checkweighing.
- Percentage weighing.
- Alibi, for approved weight transmission (optional).
- Counting.
- Input/Output.

I/O SECTION:

- RS232/C bidirectional port on RJ connector for quick connection (USB or RS485 optionally), configurable for PC, PLC, additional remote display.
- RS232/C bidirectional port for connection to printer or labeller.

DIMENSIONS mm

- Values in mm

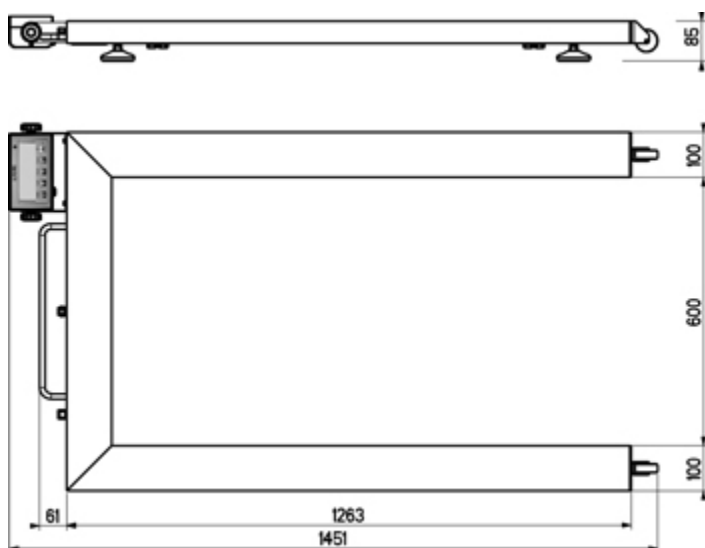

VERSIONS

Versioni disponibili

Codice	l x w x h (mm)	Max (kg)	d (kg)	M 2R (kg)
EPWL	1260x800x85	600/1500/2000	0,2/0,5/1	--
EPWLM M	1260x800x85	1000/2000	--	0,5/1



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI AR GEO
FRANCE sarl
Nogent-sur-Marne
info.fr@diniargeo.com

DINI AR GEO
GMBH
Sinsheim - Germany
info.de@diniargeo.com

DINI AR GEO
UK Ltd
Taunton - United Kingdom
info.uk@diniargeo.com

DINI AR GEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China
info.cn@diniargeo.com

DINI AR GEO
WEIGHBRIDGES
Calto (RO) – Italy
info@diniargeo.com



HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 843418 Fax. +39.0536 843521
info@diniargeo.com

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 921784 Fax. +39.0536 926654
service@diniargeo.com



SALES AND TECHNICAL ASSISTANCE SERVICE

All the specifications and images can be subject to variations and upgrades without prior notice.