

MCWH

MCWHU "HULK" SERIES SUSPENDED CRANE SCALES



High capacity crane scales for industrial use, reliable and easy to use, suitable both for business warehouses as well as for more adverse environments. Available for internal factory use or CE-M APPROVED. TAKES UP LITTLE SPACE allowing the best use of the lifting devices (overhead bridge, crane, etc.). Predisposed for an upper connection ring and lower hook. The models with up to 15000 kg capacity are fitted with test certificate obtained with sample weights.

Working in cooperation with:

CBH VAEGTE APS

VONSILDVEJ 207 - 6000 - KOLDING
Tel. 004575567310 Fax. 004575567320
info@cbh-vaegte.dk

The best solution
for advanced industrial
applications

MAIN FEATURES

- 40 mm RED LED display.
- Waterproof keyboard with 5 keys which are ZERO, AUTOMATIC TARE, MODE, PRINT, and ON/OFF.
- Protective screen in plexiglas for display and keyboard.
- Precision: +/- 0.05% F.S.
- Built extremely sturdy in oven-fire painted sheet steel, with I P 6 7 protection degree against dust and sprays.
- Weighs about 86 kg.
- Radiofrequency 6-key remote control, 433MHz, for use up to 50 m of distance. Configurable as automatic tare only or as a remote keypad.
- Fitted with extractable rechargeable battery pack, with 60-hour operating time, designed to be combined with MCWHBK option for 24/7 continuous use of the crane scale. Standard fitted with battery charger.
- Digital set-up and calibration programmable directly from keyboard using a sample weight.
- Operating temperature: -10 /+80°C, with optional thermal shield (-10/+40°C for the CE-M approved model).
- Programmable digital filter and auto power saving function.
- Equipped with 230 Vac 50 Hz battery charger, for charging the battery from the crane scale.

SELECTABLE FUNCTIONS

- High Resolution Weighing x 10.
- Net/Gross or lb/kg conversion.
- Accumulation.
- +/- Checkweighing.
- Percentage weighing.
- Counting.
- HOLD (lock of the displayed weight).
- PEAK (maximum value read).
- Peer-to-peer.

AVAILABLE FUNCTIONS FROM REMOTE CONTROL

- Zero; tare; enable / disable function; print; switch-off.

WEIGHTS OF THE CRANE SCALES

- Weight in kg

Models	without packing	including packing
MCWHU10	73 kg	86 kg
MCWHU15		
MCWHU25		
MCWHU35		

OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Radio frequency transmission to remote indicator up to 70 m indoors.
- WI-FI interface.
- Thermal shield for protection from infrared rays and high temperatures.
- Remote weight indicator (see DFW..., 3590..., TRS..., DGT.. series weight indicators) with printer or other accessories connected through radio frequency.
- Separate 230 Vac 50 Hz recharging station for 24/7 continuous use, made up of additional battery pack and adapter for the external recharge of the battery.
- Date and Time.
- ACCREDIA calibration certificate according to OIML/ASTM standards.
-
-

DETAIL 1




MCWHU: view of the back.

DETAIL 2



Fitted with extractable rechargeable battery pack.

DETAIL 3

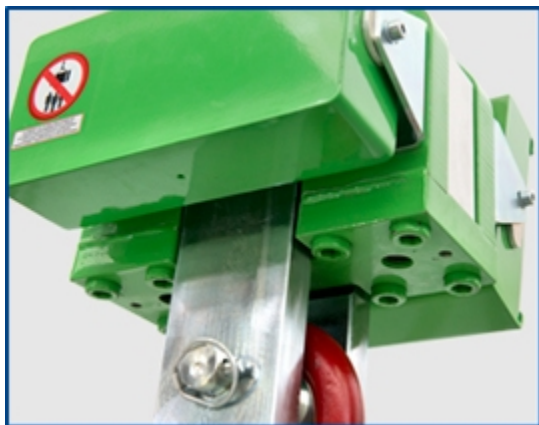

Reinforced base.

DETAIL 4



Protective screen in plexiglas for display and keyboard.

VERSIONS

Versioni disponibili

Codice	Max (kg)	d (kg)	M (kg)
MCWHU10-2	10000	2	--
MCWHU15-2	15000	2	--
MCWHU25-2	25000	5	--
MCWHU35-2	35000	10	--
MCWHU10M-2 M	10000	--	10
MCWHU15M-2 M	15000	--	10



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
Nogent-sur-Marne

DINI ARGEO
GMBH
Sinsheim - Germany

DINI ARGEO
UK Ltd
Taunton - United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China

DINI ARGEO
WEIGHBRIDGES
Calto (RO) – Italy



HEAD OFFICE
Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy



CBH VAEGTE APS

VONSILDVEJ 207 - 6000 - KOLDING

Tel. 004575567310 Fax. 004575567320

info@cbh-vaegte.dk

SALES AND TECHNICAL ASSISTANCE SERVICE